


400 Amp System - Event

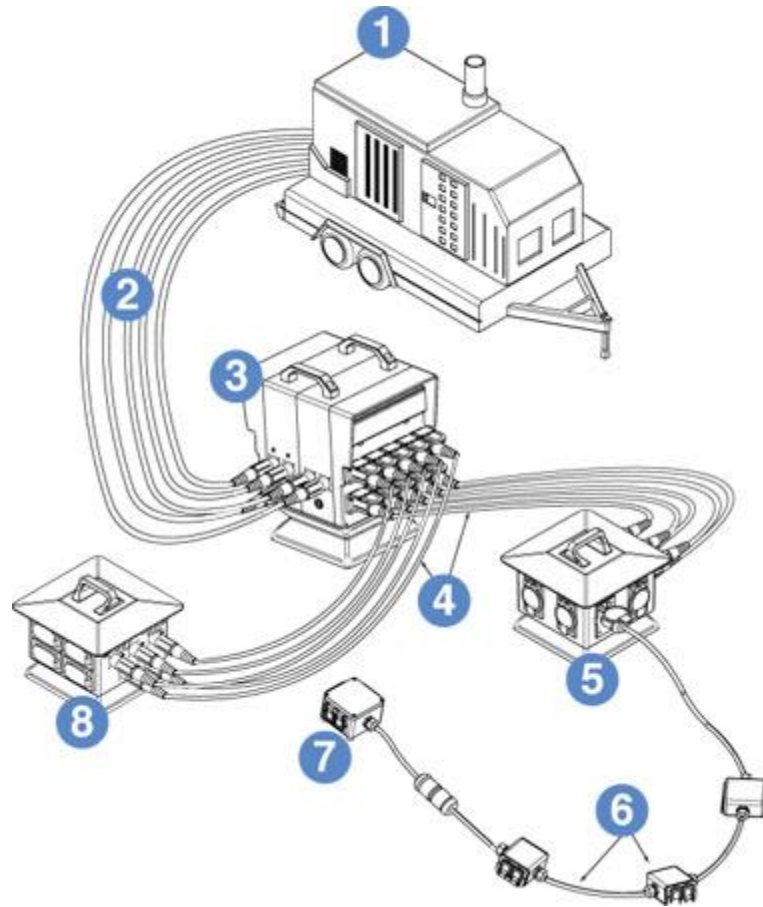

1. **Generator** - 150 KVA
400 A, 3 Ø, 120/208 VAC
2. **Cables** - 4/0 AWG Type W
(5) wire Cam Extensions
3. **Hammerhead Distribution Box**
400 A, 3 Ø
120/208 VAC Cam Input
100 A, (5) Wire Cam Receptacles
NEMA 3R Weatherproof
Cat. No. DB400N1J4AJ2CC-63
4. **Cables** - #2 AWG Type SC
(5) Wire Banded Cam Ext.
5. **Pagoda Distribution Box**
100 A, 3 Ø
120/208 VAC Cam Input
(5) L21-20, 20 A
120/208 VAC Receptacles,
NEMA 3R Weatherproof
Cat. No. DB100NP-AFF-S3
6. **Quad Stringer**
L21-20, 20 A 120/208 VAC Feed Thru
to (6) 20 A, 125 VAC
GFCI Receptacles
NEMA 3R Weatherproof
Cat. No. DB20-QD50GF-3FT
7. **Cube Distribution Box**
L21-20, 20 A Input
(3) 20 A, 125 VAC
GFCI Receptacles
NEMA 3R Weatherproof
Cat. No. DB20-C13GFI
8. **Pagoda Distribution Box**
100 A, 3 Ø
120/208 VAC Cam Input
(12) 20 A, 125 VAC
GFCI Receptacles
NEMA 3R Weatherproof
Cat. No. DB100NP-AQQ-S3